
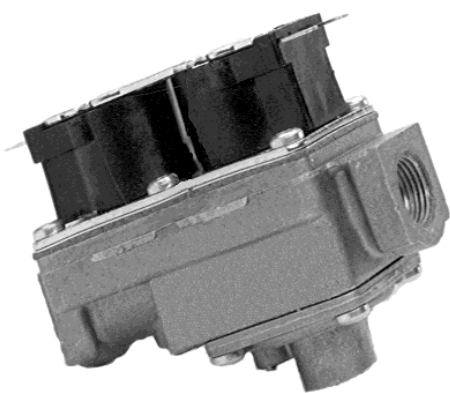


# Combination Gas Valves

## CV200 COMBINATION GAS VALVE

- Two solenoid shut-off valves with built-in pressure regulator
- CSA certified and UL recognized
- 1.0" w.c. pressure drop @ 40,000 Btu/hr. NAT
- Range of Regulation: 2,500 to 45,000 Btu/hr
- Operating temperature range: -40° to 175°F
- Rated inlet pressure: 1/2 psi maximum
- Inlet-outlet connection: 3/8" x 3/8" NPT (maximum) *for other sizes consult Maxitrol*
- Optional right side inlet
- For use with direct burner electric ignition systems only (no pilot connection outlet)
- 24 VAC or 12 VDC coils
- Used with Natural, Propane, or L.P. gases
- Optional electric switch provides gas shut-off (switch not shown)
- Optional Convertible Regulator

## CV200 Sizing Chart

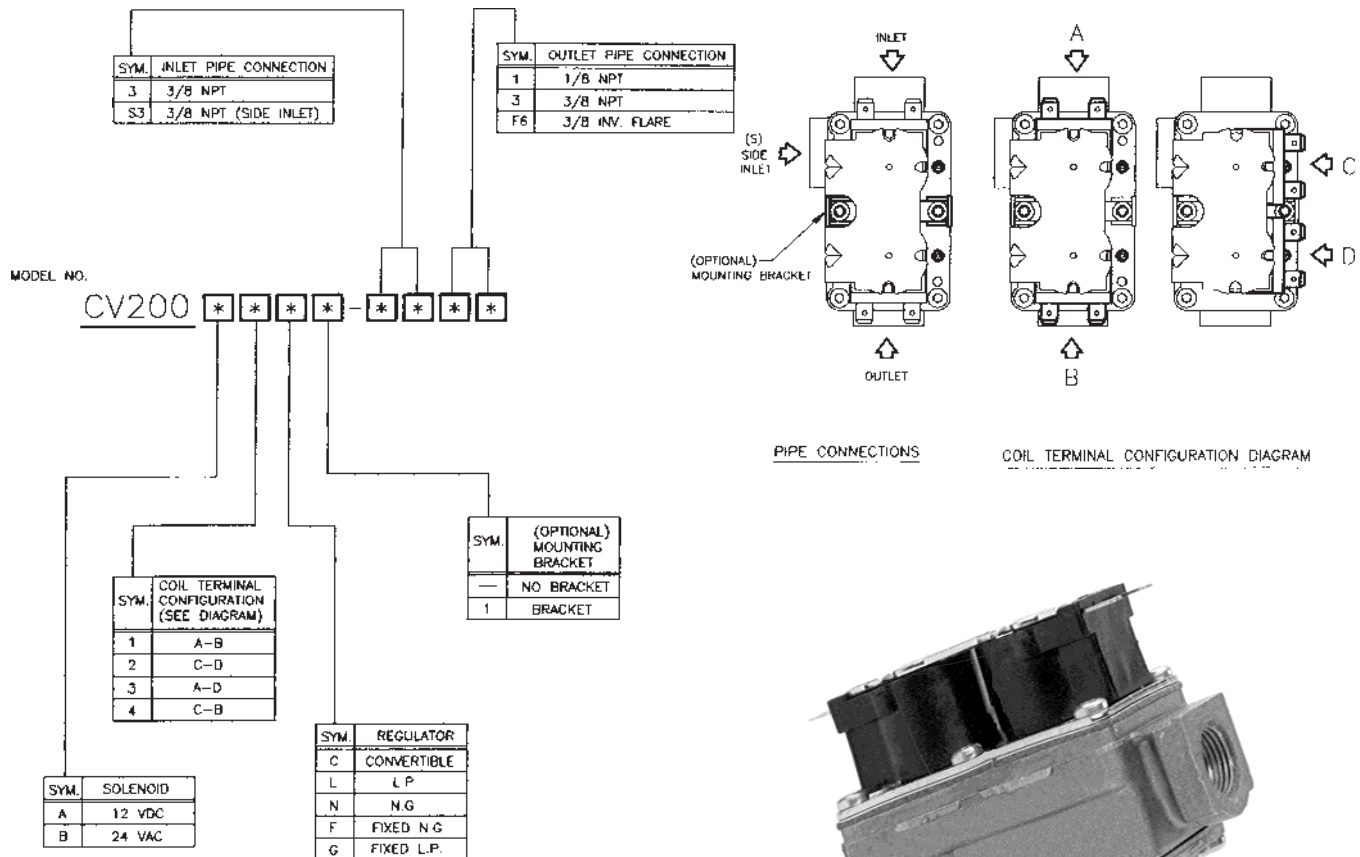

23555 TELEGRAPH RD. • P.O. BOX 2230 • SOUTHFIELD, MI U.S.A. 48037-2230  
 WWW.MAXITROL.COM • 248/356-1400 • FAX 248/356-0829 • E-MAIL: INFO@MAXITROL.COM