


Remote Control Sets

with Flame Height Adjustment for Fireplaces, Gas Space Heaters and Patio Heaters

- Battery powered, no external power required
- Compact receiver design

Options

- Room temperature display in °F / °C changeable
- Remote control with two button operation prevents accidental lighting (per GAD90/396/CE)
- Programmable room temperature
- Automatic temperature control regulates to room temperature setting
- Timer function

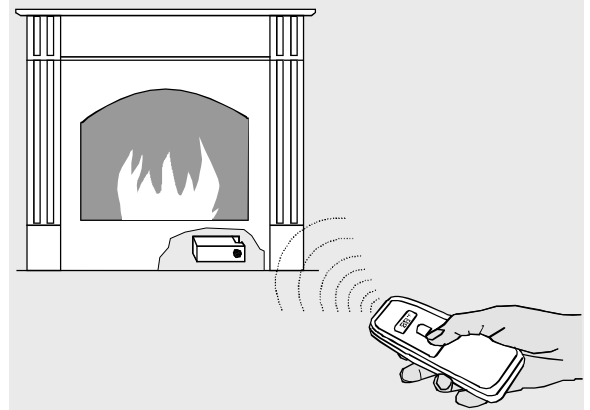

G30-ZRPS	G30-ZRPSO	G30-ZRPD	G30-ZRPDO	G30-ZRPTT
Standard hand-held remote	Standard hand-held remote for open fires	Hand-held remote with room temperature display	Hand-held remote with room temperature display for open fires	Remote with thermostat and timer function
<p>Remote (not programmable)</p> <ul style="list-style-type: none"> ● compatible with GV34, 35, 38 gas combination controls and with GV30 & GV36 retrofitted with motors ● compatible with Mertik Maxitrol's previous version receivers. 				<p>Remote (programmable)</p> <ul style="list-style-type: none"> ● compatible with GV34 and GV36* retrofitted with motor ● 4 set points programmable

*manufactured since September 2001

Technical Data

Ultrasound transmission	Frequency:	ON 40,5kHz, OFF 40kHz	Caution, if the appliance is left unattended in the on position extraneous sound waves can activate the ultrasonic receiver and change the flame height adjustment.
Ambient temperature range	Working Range:	1,6'/0,5 to 32.8'/10m	
Batteries	Remote and Receiver:	max. 140°F / 60°C	
Connecting cable	Connecting cable:	max. 356°F / 180°C	
	Quality Alkaline:	Remote: 1 x 9 V Block Receiver: 4 x 1,5 V AA	
	Standard length:	31.5" / 0,8m	